
WESLEYTOOL

GENERAL CATALOGUE

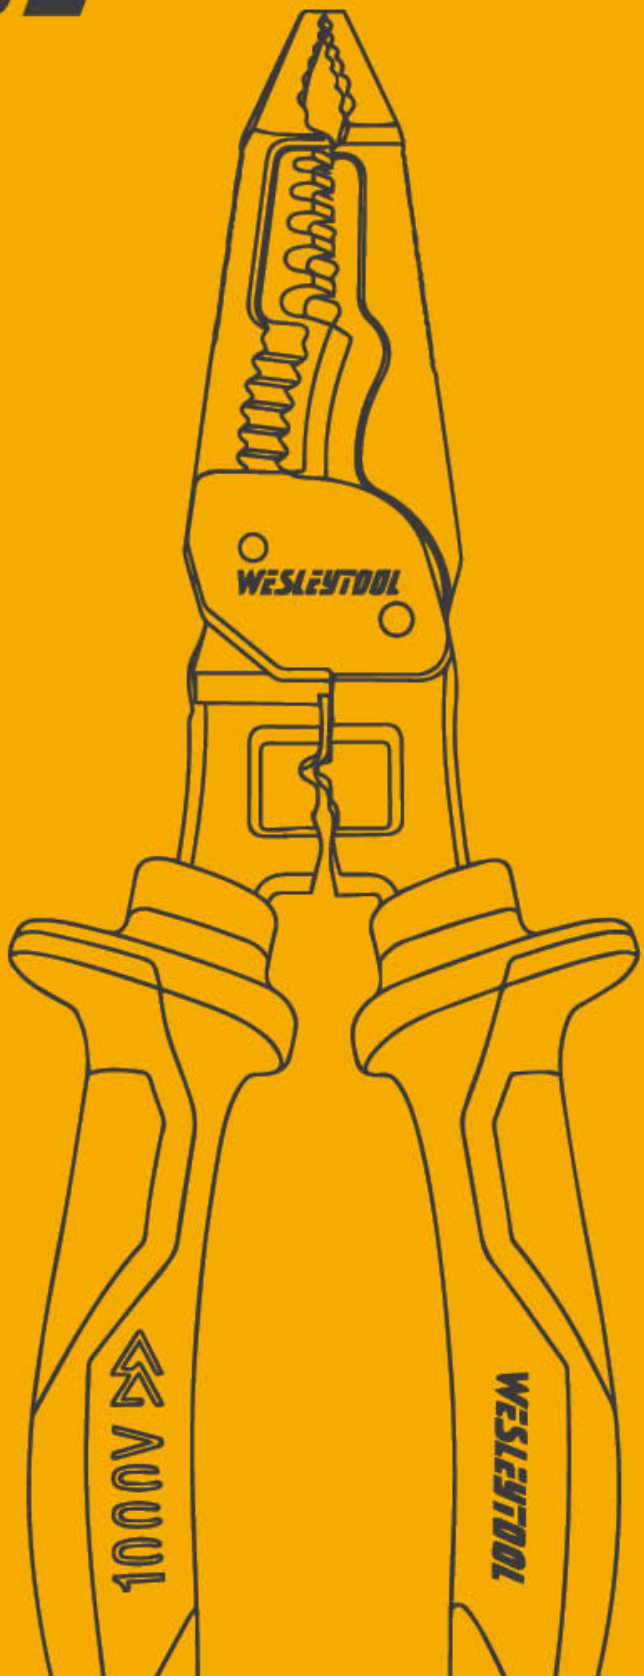

www.countool.com

1000V C 25
IEC 60900

Company Introduction

Wesleytool co.,ltd is a professional manufacturer of insulation tools, export department in Shanghai, and factory in Taizhou, Jiangsu. We have VDE Certificate in Germany.

Our factory was established in 2002. 2018 Turnover: US$4.3M, with 5000m^2 plant and 70 employees. We have professional testing equipments, and quality control team. We are specialized in manufacturing various kinds of VDE/GS 1000V insulation pliers, VDE/GS 1000V insulation screwdriver, VDE/GS 1000V insulation adjustable wrench, VDE/GS 1000V insulation open end spanner , VDE/GS 1000V Insulation ring spanner, VDE/GS 1000V insulation socket, VDE/GS 1000V insulation ratchet handle, VDE/GS 1000V Insulation T Handle nut driver, VDE/GS 1000V insulation T handle hex key, VDE/GS 1000V insulation L type hex key, VDE/GS 1000V Insulation wire knife, VDE/GS 1000V insulation spring clamp, 1000V bolt cutter, 1000V hack saw, VDE/GS 1000V insulation tool kit etc.















04-16 »
Insulated Tools



17-24 »
Pliers



25-31 »
Automotive Repair Series



We insist on the principle of people oriented and creditable management to serve you. We sincerely hope to make a cooperation with customers at home and abroad to reach a win-win situation.

Insulated combination pliers

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control





Finish:
- Polished

Material:
- High performance 60CRV steel

Cutting edge hardness:
- 58-65 HRC



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS02-06CS	160	6	3.1	2	1.6	214
CLS02-07CS	180	7	3.4	2.2	1.8	265
CLS02-08CS	200	8	3.8	2.5	2	327

Eccentric lineman's pliers

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control



Finish:
- Polished

Material:
- High performance 60CRV steel

Cutting edge hardness:
- 58-65 HRC

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS02-09CS	240	9.5	4	2.6	2.2	512

Eccentric lineman's pliers





- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control

Finish:
- Polished

Material:
- High performance 60CRV steel

Cutting edge hardness:
- 58-65 HRC



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS02-06LS	160	6	2.5	1.8	1.2	164
CLS02-07LS	180	7	2.8	2	1.4	173
CLS02-08LS	200	8	3.2	2.2	1.6	224

Insulated diagonal pliers



- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control

Material:
- High performance 60CRV steel



Finish:
- Polished

Cutting edge hardness:
- 58-65 HRC

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS02-06DS	160	6	3	2	1.6	209

Insulated diagonal pliers

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control





THAN ORDINARY PLIERS
30%
SAVE LABOUR

Finish:
- Polished

Material:
- High performance 60CRV steel

Cutting edge hardness:
- 58-65 HRC



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS02-07DS	180	7	3.5	2.5	2	267
CLS02-08DS	200	8	3.8	2.7	2.2	344

Insulated bent nose pliers







- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control

Finish:
- Polished

Material:
- High performance 60CRV steel

Cutting edge hardness:
- 58-65 HRC

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS02-06BLS	6	2.5	1.8	1.2	164	164
CLS02-07BLS	7	2.8	2	1.4	173	173
CLS02-08BLS	8	3.2	2.2	1.6	224	224

Insulated wire stripping pliers







- For work on live equipment, up to 1000V
- Soft grip insulated tri-material handles for comfort and control

Finish:
- Polished

Material:
- High performance steel

Cutting edge hardness:
- 42-48 HRC

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)	weight (g)
			Cu and Al	
CLS02-06WS	160	6	up to 10 mm²	187

Insulated wire stripping pliers



- For work on live equipment, up to 1000V
- Soft grip insulated tri-material handles for comfort and control

Material:
- High performance steel

Finish:
- Polished



Hardness:
- 42-48 HRC

ItemNo.	L (mm)	L (inch)	weight (g)
CLS02-06RS	160	6	139

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

Insulated flat nose pliers



- For work on live equipment, up to 1000V
- Soft grip insulated tri-material handles for comfort and control

Material:
- High performance steel

Finish:
- Polished



Hardness:
- 42-48 HRC

ItemNo.	L (mm)	L (inch)	weight (g)
CLS02-06RS	160	6	163

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

Insulated cable cutter







Material:
- High performance 60CRV steel

Finish:
- Polished

Cutting edge hardness:
- 58-65 HRC

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft wire
- Soft grip insulated tri-material handles for comfort and control



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter) Cu and Al	weight (g)
CLS02-06SS	160	6	up to 40 mm²	208
CLS02-010SS	230	9	up to 60 mm²	489

Insulated multi-function pliers

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft wire
- Function:Wire Strippers size:1.5-2.5-4-6-8mm²;
- Crimping terminal szie: 2.5-4-6mm²
- Soft grip insulated tri-material handles for comfort and control



Material:
- High performance 60CRV steel

Finish:
- Polished

Cutting edge hardness:
- 58-65 HRC



ItemNo.	L (mm)	L (inch)	weight (g)
CLS02-08MS	200	8	274

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

Insulated wire stripping pliers

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control





Finish: Polished
Material: High performance 40CRV steel
Cutting edge hardness: 58-65 HRC

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)		weight (g)
			Cu and Al	med-hard steel wire	
CLS02-06EC	160	6	3.5	1.6	255
CLS02-08EC	200	8	4	2	398

Insulated water pump pliers

- For work on live equipment, up to 1000V
- Soft grip insulated tri-material handles for comfort and control

Finish: Polished
Material: High performance CRV steel
Cutting edge hardness: 42-48 HRC




ItemNo.	L (mm)	length (mm)	Crimping terminal szie
CLS02-010PS	250	10	453
CLS02-010QPS	250	10	412



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

Insulated screwdrivers

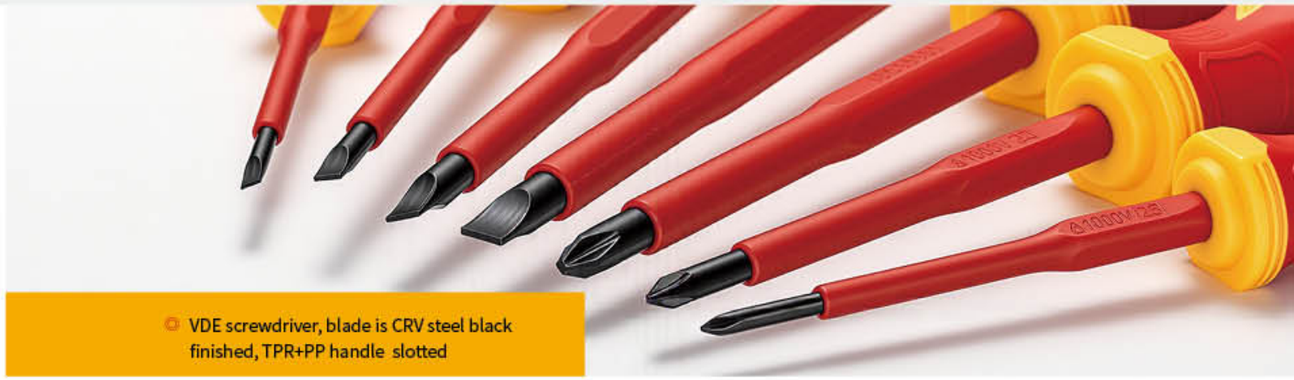

- VDE screwdriver, blade is CRV steel black finished, TPR+PP handle slotted

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	Blade thickness mm	Blade width mm	Blade length mm
VDE03-003SL-075PH	0.5	3	75
VDE03-004SL-0100PH	0.8	4	100
VDE03-055SL-0125PH	1.0	5.5	125
VDE03-065SL-0150PH	1.2	6.5	150
VDE03-008SL-0175PH	1.6	8	175



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	Size	Blade length(mm)
VDE03-003PH-075PH	PH0	75
VDE03-005PH-080PH	PH1	80
VDE03-006PH-0100PH	PH2	100
VDE03-008PH-0150PH	PH3	150
VDE03-03PZ-075PH	PZ0	75
VDE03-05PZ-080PH	PZ1	80
VDE03-06PZ-100PH	PZ2	100
VDE03-08PZ-150PH	PZ3	150





3pcs Vde Plier Set

CLS02-03TK-NY

- 180mm Combination Plier
- 200mm Long Nose Plier
- 160mm Diagonal Plier

6pcs Vde Screwdriver And Plier Set

CLS02-060TK-NY

- 160mm Diagonal Plier
- Screwdriver
  3x75mm, 4x100mm, 5.5x125mm,
  Ph1x80, Ph2x100mm





4pcs vde tool set

CLS02-04TK-NY

- 1pc 6'' diagonal cutter plier
- 1pc 6'' wire stripper
- 1pc 7'' combination plier
- 1pc 8'' long nose plier





11PCS VDE TOOL

CLS02-011TK-NY

- 1pcs 140mm Tester
- 6pcs Screwdriver
- 3x75mm, 4x100mm,
  5.5x125mm, 6x150mm, Ph1x80,
- Ph2x100mm 140mm Tester
- 1pc 6'' Diagonal Cutter Plier
- 1pc 6'' Wire Stripper
- 1pc 7'' Combination Plier
  1pc 8'' Long Nose Plier

12PCS TOOL KIT

CLS02-012TK-NY

- 1pcs 140mm Tester
- **Screwdriver**
  3x75mm, 4x100mm, 5.5x125mm,
  Ph1x80, Ph2x100mm
- 1pcs Wire Knife
- 1m Plastic Rule
- 1pc 160mm Vde Diagonal Plier
- 1pc 180mm Combination Plier
- 1pc 200mm Long Nose Plier



3pcs VDE plier set

CLS02-03PS

- 7" combination plier
- 6" Diagonal plier
- 8" long nose plier



3pcs VDE Injection multi-function plier set

CLS01-03PS

- 7" combination plier
- 7" Diagonal plier
- 7" long nose plier



4pcs VDE plier set

CLS02-04PS

- 7" combination plier
- 8" long nose plier
- 7" Diagonal plier
- 10" waterpump plier



Insulated multi-function combination pliers

- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control




THAN ORDINARY PLIERS
30% SAVE LABOUR



Material:
- High performance 55# steel

Cutting edge hardness:
- 58-65 HRC

Finish:
- Polished

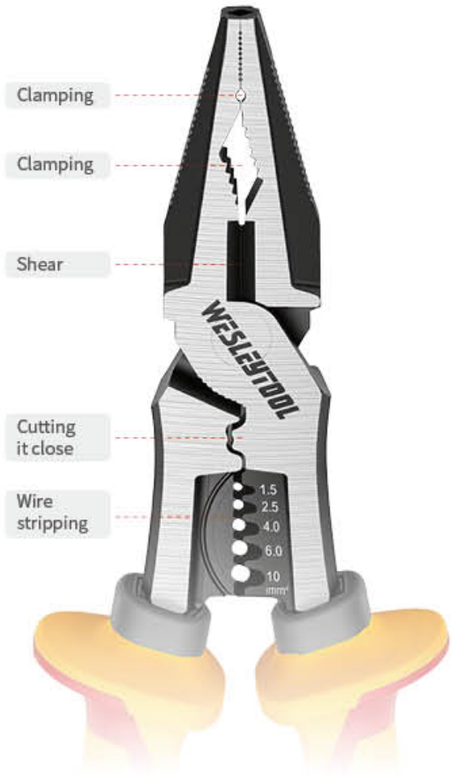



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	length (mm)	Wire Strippers size	Crimping terminal szie
CLS01-06C	6"	160	1.5-4mm²	2.5-4-6mm²
CLS01-07C	7"	180	1.5-2.5-4mm²	2.5-4-6mm²
CLS01-08C	8"	200	1.5-2.5-4-6-10mm²	2.5-4-6mm²

Insulated multi-function diagonal pliers



- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control

THAN ORDINARY PLIERS
30% SAVE LABOUR



When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	length (mm)	Wire Strippers size	Crimping terminal szie
CLS01-06D	6"	160	1.5-2.5-4mm²	2.5-4-6mm²
CLS01-07D	7"	180	1.5-2.5-4-6-10mm²	2.5-4-6mm²

Finish:
- Polished

Cutting edge hardness:
- 58-65 HRC


Material:
- High performance 55# steel

Insulated multi-function long nose pliers



- For work on live equipment, up to 1000V
- With induction hardened cutting edge for soft and hard wire
- Soft grip insulated tri-material handles for comfort and control

THAN ORDINARY PLIERS
30% SAVE LABOUR

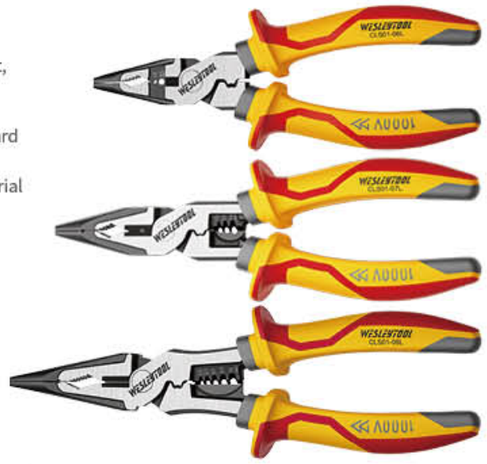

When in contact with a live power source, it is strictly forbidden to touch the exposed metal of the tool or other conductive objects.

ItemNo.	L (mm)	length (mm)	Wire Strippers size	Crimping terminal szie
CLS01-06L	6"	160	1.5-4mm²	2.5-4-6mm²
CLS01-07L	7"	180	1.5-2.5-4mm²	2.5-4-6mm²
CLS01-08L	8"	200	1.5-2.5-4-6-10mm²	2.5-4-6mm²

Finish:
- Polished

Cutting edge hardness:
- 58-65 HRC

Material:
- High performance 55# steel

1000V C 25
IEC 60900

WESLEYTOOL

Compact tool case



CLS01-030PC06
3PCS VDE Multi-Function plier

- 160mm combination plier
- 160mm long nose plier
- 160mm diagonal plier



CLS01-030PC07
3PCS VDE Multi-Function plier

- 180mm combination plier
- 200mm long nose plier
- 160mm diagonal plier





CLS01-030PC010
10pcs Plier And Screwdriver

- 5pcs Screwdriver
  3x75mm, 4x100mm, 5.5x125mm, Ph1x80, Ph2x100mm
- 1pc 140mm Tester
- 3pcs Plier
- 6"Combination Plier
- 6"Long Nose Plier
- 6"Diagonal Plier 1pcs Stright Cable Cutter

DIN STAND PLIER

The blade edge is reinforced with induction hardening technology, enabling clean and neat cutting of both hard and soft wires; the dual-material soft rubber grip fits the hand perfectly, ensuring a comfortable and non-slip hold for more precise control; the fully polished surface treatment gives a delicate texture, resists rust, and ensures long-lasting durability.

www.countool.com

WESLEYTOOL

Combination pliers



- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip bimaterial handles for comfort and control
- Finish: polished

Material:
- High performance 60CRV steel

Standard:
- ISO 5746

Max. cutting edge hardness:
- 58-65 HRC



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS04-06CS	160	6	3.1	2	1.6	205
CLS04-07CS	180	7	3.4	2.2	1.8	260
CLS04-08CS	200	8	3.8	2.5	2	319

long nose pliers



- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip bimaterial handles for comfort and control
- Finish: polished

Material:
- High performance 60CRV steel

Max. cutting edge hardness:
- 58-65 HRC

Standard:
- ISO 5746



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS04-06LS	160	6	2.5	1.8	1.2	149
CLS04-08LS	200	8	3.2	2.2	1.6	213

Diagonal pliers



- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip bimaterial handles for comfort and control
- Finish: polished

Material:
- High performance 60CRV steel

Max. cutting edge hardness:
- 58-65 HRC

Standard:
- ISO 5749



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS04-06DS	160	6	3	2	1.6	201

Heavy duty diagonal pliers

- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip bimaterial handles for comfort and control
- Finish: polished

THAN ORDINARY PLIERS
30%
SAVE LABOUR



Material:
- High performance 60CRV steel

Max. cutting edge hardness:
- 58-65 HRC

Standard:
- ISO 5749



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter)			weight (g)
			Cu and Al	med-hard steel wire	hard steel wire	
CLS04-07DS	180	7	3.5	2.5	2	254
CLS04-08DS	200	8	3.8	2.7	2.2	330

Bent nose pliers



- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip bimaterial handles for comfort and control
- Finish: polished



Max. cutting edge hardness:
- 58-65 HRC

Material:
- High performance 60CRV steel

Standard:
- ISO 5745



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter) Cu and Al	med-hard steel wire	hard steel wire	weight (g)
CLS04-06BLS	160	6	2.5	1.8	1.2	149
CLS04-08BLS	200	8	3.2	2.2	1.6	213

Round nose pliers



- Handles: soft grip bimaterial handles for comfort and control
- Finish: polished





Warning
No live work permitted


ItemNo.	L (mm)	L (inch)	weight (g)
CLS04-06RS	160	6	131

Material:
- High performance steel

Max. cutting edge hardness:
- 42-46 HRC

Standard:
- ISO 5745

Wire stripping pliers







- Soft grip bimaterial handles for comfort and control
- Finish: polished



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter) Cu and Al	weight (g)
CLS04-07FS	160	6	up to 10 mm²	186

Material:
- High performance steel

Max. cutting edge hardness:
- 42-46 HRC

Cable cutter







- With induction hardened cutting edge for soft wire
- Soft grip bi-material handles for comfort and control
- Finish: polished



Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter) Cu and Al	weight (g)
CLS04-06SS	160	6	up to diameter 9mm	160
CLS04-08SS	200	8	up to diameter 11mm	270
CLS04-10SS	250	10	up to diameter 13mm	340

Material:
- High performance 60CRV steel

Max. cutting edge hardness:
- 58-65 HRC

Cable cutter





- With induction hardened cutting edge for soft wire
- Soft grip bi-material handles for comfort and control
- Finish: polished

Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	cutting capacity(diameter) Cu and Al	weight (g)
CLS04-010SS	230	9	up to diameter 13mm	475

Material:
- High performance 60CRV steel

Max. cutting edge hardness:
- 58-65 HRC

Water pump pliers

- Soft grip bimaterial handles for comfort and control
- Finish: polished







Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	weight (g)
CLS04-010PS	250	10	434

Material:
- High performance CRV steel

Max. cutting edge hardness:
- 42-46 HRC

Multi-function pliers

- With induction hardened cutting edge for soft wire
- Function:Wire Strippers size:1.5-2.5-4-6-8mm² ;
- Crimping terminal szie: 2.5-4-6mm²
- Soft grip bimaterial handles for comfort and control
- Finish: polished







Warning
No live work permitted

ItemNo.	L (mm)	L (inch)	weight (g)
CLS04-08MS	200	8	261

Material:
- High performance 60CRV steel

Max. cutting edge hardness:
- 58-65 HRC

Multi-function combination pliers

- With induction hardened cutting edge for soft and hard wire
- Soft grip bimaterial handles for comfort and control
- Finish: polished







Warning
No live work permitted

ItemNo.	L (mm)	length (mm)	Wire Strippers size	Crimping terminal szie
CLS03-06CL	6"	160	1.5-4mm²	2.5-4-6mm²
CLS03-07CL	7"	180	1.5-2.5-4mm²	2.5-4-6mm²
CLS03-08CL	8"	200	1.5-2.5-4-6-10mm²	2.5-4-6mm²

Material:
- High performance 55# steel

Max. cutting edge hardness:
- 58-65 HRC

WESLEYTOOL

Multi-function diagonal pliers

- With induction hardened cutting edge for soft and hard wire
- Soft grip bimaterial handles for comfort and control
- Finish: polished







THAN ORDINARY PLIERS
30%
SAVE LABOUR

Material:
- High performance 55# steel

Max. cutting edge hardness:
- 58-65 HRC

Warning
No live work permitted

ItemNo.	L (mm)	length (mm)	Wire Strippers size	Crimping terminal szie
CLS03-06DL	6"	160	1.5-2.5-4mm²	2.5-4-6mm²
CLS03-07DL	7"	180	1.5-2.5-4-6-10mm²	2.5-4-6mm²





Multi-function long nose pliers

- With induction hardened cutting edge for soft and hard wire
- Soft grip bimaterial handles for comfort and control
- Finish: polished





THAN ORDINARY PLIERS
30%
SAVE LABOUR

Material:
- High performance 55# steel

Max. cutting edge hardness:
- 58-65 HRC

Warning
No live work permitted

ItemNo.	L (mm)	length (mm)	Wire Strippers size	Crimping terminal szie
CLS03-06LL	6"	160	1.5-4mm²	2.5-4-6mm²
CLS03-07L	7"	180	1.5-2.5-4-6-10mm²	2.5-4-6mm²
CLS03-08L	8"	200	1.5-2.5-4-6-10mm²	2.5-4-6mm²





Automotive Repair Series

WESLEYTOOL

www.countool.com ..

long reach heavy duty diagonal pliers

- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip for comfort and control (Plastisol Grip and two color injection grip for option)
- Finish: polished

Material:
- High performance steel

Max. cutting edge hardness:
- 58-65 HRC



CLS05-011LD
280mm (11")

long reach long nose pliers

- With induction hardened cutting edge for soft and hard wire
- Handles: soft grip for comfort and control (Plastisol Grip and two color injection grip for option)
- Finish: polished

Material:
- High performance steel

Max. cutting edge hardness:
- 58-65 HRC

Option: 1. with cutter 2. without cutter



CLS05-011LD
280mm (11")

long reach bent nose pliers with

- Handles: soft grip for comfort and control (Plastisol Grip and two color injection grip for option)
- Finish: polished

Material:
- High performance steel

Max. cutting edge hardness:
- 40-46 HRC

Option: 1. 22 degree. 2. 45 degree. 3. 90 degree.



CLS05-011LBN
280mm (11")

long reach flat nose pliers

- Handles: soft grip for comfort and control (Plastisol Grip and two color injection grip for option)
- Finish: polished
- Material: High performance steel
- Hardness: 40-46 HRC

CLS05-011LFN 280mm (11")



long reach gripper

- Handles: soft grip for comfort and control (Plastisol Grip and two color injection grip for option)
- Finish: polished
- Material: High performance steel
- Hardness: 40-46 HRC

Option: 1. Large 2. Medium 3. Small

CLS05-011LRG 280mm (11")



Pistol grip double joint long reach pliers

flat nose pliers

CLS05-011-013DLFN
330mm (13")

- Handles: soft Plastisol Grip for comfort and control
- Finish: polished
- Material: High performance steel
- Hardness: 40-46 HRC




long nose pliers

CLS05-011-013DLLN
330mm (13")

- Handles: soft Plastisol Grip for comfort and control
- Finish: polished
- Material: High performance steel
- Hardness: 40-46 HRC

Option: 1. straight nose 2. bent nose



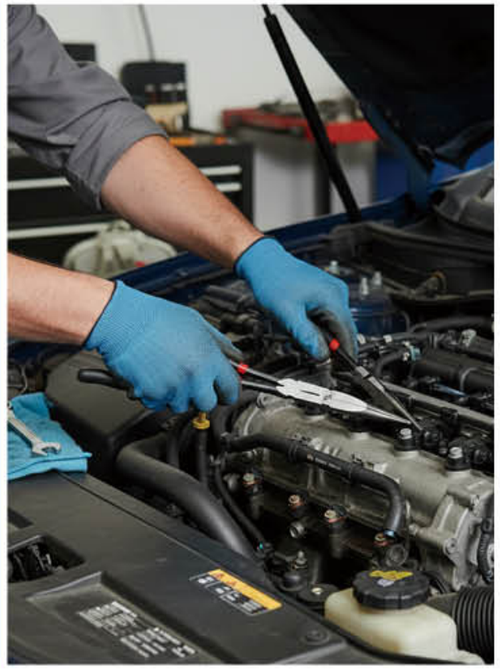

long nose pliers

CLS05-011-015DLLN
380mm (13")

- Handles: soft Plastisol Grip for comfort and control
- Finish: polished
- Material: High performance steel
- Hardness: 40-46 HRC



Double joint long Reach pliers

- Handles: soft Plastisol Grip for comfort and control
- Finish: polished
- Material: High performance steel
- Hardness: 40-46 HRC



long nose pliers

CLS05-011-013LLN

330mm (13")

Option:

1. straight nose 2. bent nose 45 degree
3. bent nose 90 degree

flat nose pliers

CLS05-011-013LFN

330mm (13")

long reach gripper

CLS05-013LRG

330mm (13")

Option: 1. Large 2. Medium 3. Small



Pistol grip long nose pliers

- With induction hardened cutting edge for soft and hard wire
- Handles: soft plastisol grip for comfort and control
- Finish: polished
- Material: High performance steel
- Max. cutting edge hardness: 58-65 HRC



CLS06-060LN
160mm (6")

CLS06-080LN
200mm (8")

CLS06-090LN
220mm (9")

Crimping and cutting tool

- With induction hardened wire cutter on the nose
- Crimps insulated and non-insulated 10-22 AWG solderless terminals and connectors
- Handles: soft plastisol grip for comfort and control
- Finish: polished
- Material: High performance steel
- Max. cutting edge hardness: 58-65 HRC


CLS09-090MP 220mm (9")





Multi-purpose mig welding pliers

- Laser hardened cutting edge.
- Use for all basic welding operations including: trimming mig wire, holding mig tips or nozzles, and removing spatter.
- Spring loaded for precise control and operation.
- Handles: soft plastisol grip for comfort and control
- Finish: polished
- Material: High performance steel
- Max. cutting edge hardness: 58-65 HRC

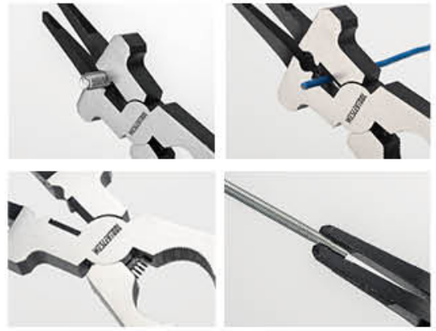



CLS07-090MP
200mm (8")



CLS08-090MP
200mm (8")

Electrical disconnect pliers



- Easily Removes Locking Push Tab Style Electrical Connectors
- Found on Mass Air Flow Sensors, Fuel Injectors, Ignition Coils and Other Applications.
- Use the hook on the end of the pliers to pull out tab to unlock and then use the point to engage the tab.
- Squeeze the tabs together and lift to separate the connector from sensor without damage.
- Allows the technician to use the tool with one hand

Handles: soft double color injection grip for comfort and control
Finish: polished
Material: High performance steel
Max. cutting edge hardness: 40-46 HRC



CLS07-090MP
200mm (8")



CLS08-090MP
200mm (8")




Fuel line pliers

- Applied on Auto Maintenance such as remove and replace the connections on the fuel pipes. Work for electrical connections, coolant line, fuel lines, ect.
- Easy to Use: Use the special jaws to pull the connector backwards to remove it.

Handles: soft double color injection grip for comfort and control
Finish: polished
Material: High performance steel
Max. cutting edge hardness: 40-46 HRC

CLS010-085FL
200mm (8")

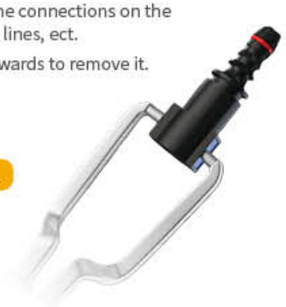







Glow plug connector remover

CLS011-090GP 240mm (9")

- designs specifically for efficient and safe removal of glow plug connectors. for use in auto repair shops, home garages, and on engineering site, ensuring quick and easy disassembly of glow plug connectors in various environment.

Handles: soft double color injection grip for comfort and control
Finish: polished
Material: High performance steel
Max. cutting edge hardness: 40-46 HRC

Angled head glow plug connector remover

- designs specifically for efficient and safe removal of glow plug connectors in areas with restricted access, with recess preventing cable damage. for use in auto repair shops, home garages, and on engineering site, ensuring quick and easy disassembly of glow plug connectors in various environment.

Handles: soft double color injection grip for comfort and control
Finish: polished
Material: High performance steel
Max. cutting edge hardness: 40-46 HRC

CLS012-090GP
240mm (9")



Panel clip pliers

- Precision Panel Clip Pliers for accessing and removal difficult flush fasteners and clips.
- 3-in-1 Versatility - Functions as a clip remover, wire cutter, and trim tool—perfect for roadside repairs or garage use.
- Rounded shoulder to help pry fasteners up

Handles: soft double color injection grip for comfort and control
Finish: polished
Material: High performance steel
Max. cutting edge hardness: 40-46 HRC



CLS012-070PC
180mm (7") WWW





CLS010-070HC
180mm (7")
WWW

Clic-r hose clamp pliers

- Designed for Clic & Clic-R Clamps – Specially engineered to remove and install Clic and Clic-R style hose clamps found in many vehicles with ease and precision
- Wide Vehicle Compatibility – Ideal for servicing fuel and coolant hose clamps in vehicles such as VW, Audi, BMW, Mercedes-Benz, Ford, Honda, Volvo, and other models with Clic systems.



Handles: soft double color injection grip for comfort and control
Finish: polished
Material: High performance steel
Max. cutting edge hardness: 40-46 HRC

1000V C 25
IEC 60900

Web: www.countool.com

Add: No.8 Jintong Road, Baimi Town, Jiangyan District,
Taizhou City (B5 Jinbotong Science Park)

Tel:0523-88690899

Mobile:13917318681

E-mail: wesley@countool.com

Taizhou Wesleytool Co.,Ltd